

The Indigo HGEbbare system is independently tested and certified to PSA MOB PF2 PS/SPU March 1992

**Typical Applications**


- Casinos
- Offices
- Any area requiring heavy duty panel with carpet tile covering

**Indigo HGEbbare**

- ✓Excellent Dimensional Stability
- ✓Superior Adhesive Technology
  - will not delaminate
- ✓Highest Density Chipboard Available
- ✓Extra over UDL test to  $\geq 15\text{kN/M}^2$
- ✓Excellent air seal



**FACTORY GUARANTEE; PANEL 25YRS PEDESTAL 50YRS**

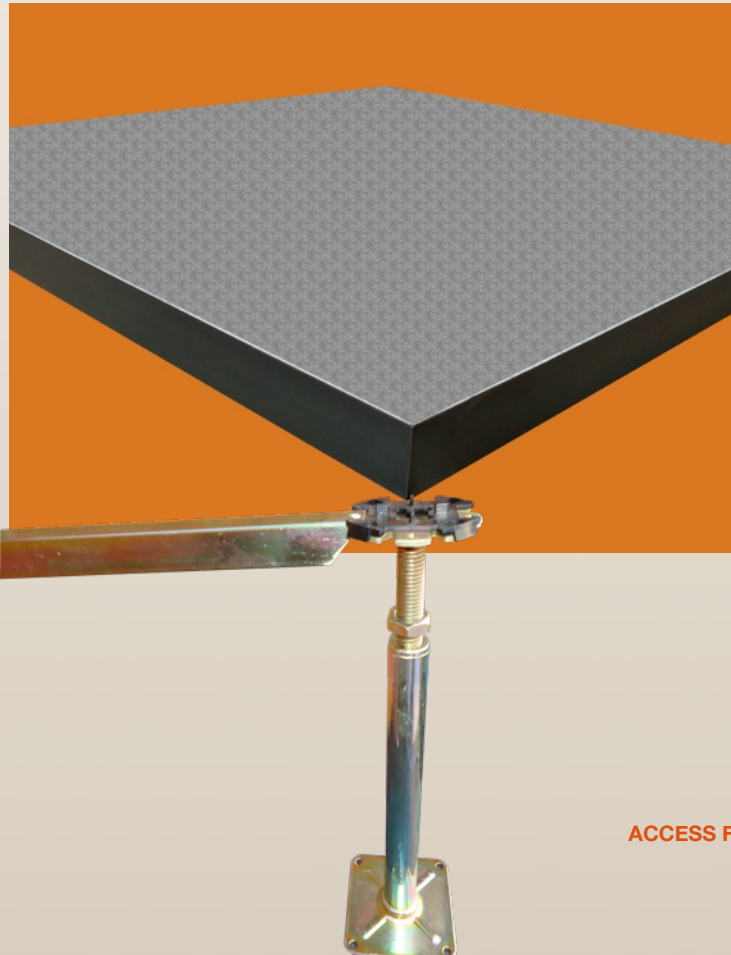

TECHNICAL SPECIFICATION	LOAD CHARACTERISTICS	DIMENSIONS	COMPONENT DETAIL
PSA MOB PF2 PS/SPU	WORKING POINT LOAD 4.5kN  ULTIMATE POINT LOAD 13.5kN	MODULE SIZE 600x600mm	Panel: 38mm high-density chipboard core Zinc whisker-free steel top & bottom.
HEAVY GRADE	WORKING UDL 15kN/M <sup>2</sup> <small>(Tested And Certified To This Load Over And Above PSA 12kN Requirement)</small>  ULTIMATE UDL 45kN/M <sup>2</sup>	THICKNESS 39.2mm	Pedestal: Heavy gauge steel construction 150x150mm base-plate. ABS Conductive Cap
FINISH - Bare steel to accept loose-lay carpet tile finish.	SAFETY FACTOR 3	WEIGHT 13.5Kg	Stringer: Bolt-on box section steel stringer  Pedestal & Stringer available in zinc whisker-free nickel plating

**ACCESS FLOORS DISTRIBUTION LIMITED**

PO Box 650  
HUNTINGDON, Cambs  
PE29 9HF  
T/01480 367096  
F/01480 330 004

E/[sales@accessfloorsdistribution.co.uk](mailto:sales@accessfloorsdistribution.co.uk)  
W/[www.accessfloorsdistribution.co.uk](http://www.accessfloorsdistribution.co.uk)