


**BSEN**

**Typical Applications**

- Offices
- Trading Floors
- Casinos

**Indigo BSEN Bare Steel**

- ✓ Fully Steel Encased
- ✓ Excellent Dimensional Stability
- ✓ Superior Adhesive Technology  
- will not delaminate
- ✓ Highest Density Chipboard Core

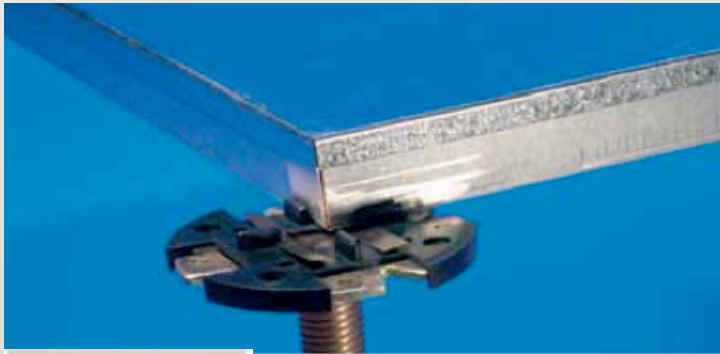

TECHNICAL SPECIFICATION	LOAD CHARACTERISTICS	DIMENSIONS	COMPONENT DETAIL
BSEN 12825: 2001	ULTIMATE POINT LOAD $\geq 6.0\text{kN}$	MODULE SIZE 600x600mm	Panel: 28mm high-density chipboard core
SAFETY FACTOR	WORKING UDL	THICKNESS 29mm	Pedestal: Steel adjustable to suit floor height. ABS Conductive Cap
X 2	3.0kN		
X 3	2.0kN		
UDL (not part of BSEN test)	15-20kN/M <sup>2</sup>	WEIGHT 10Kg	Stringer Required Above 600mm Void

**ACCESS FLOORS DISTRIBUTION LIMITED**

PO Box 650  
HUNTINGDON, Cambs  
PE29 9HF  
T/01480 367096  
F/01480 330 004

E/[sales@accessfloorsdistribution.co.uk](mailto:sales@accessfloorsdistribution.co.uk)  
W/[www.accessfloorsdistribution.co.uk](http://www.accessfloorsdistribution.co.uk)